


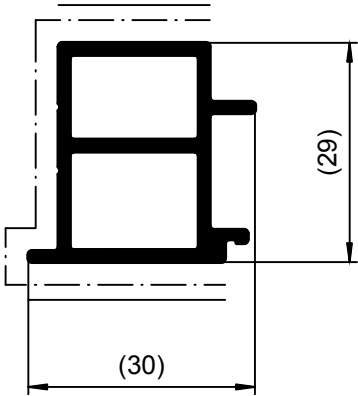

Attention!
This profile is designed for structural glazing applications!
The currently valid structural glazing bonding regulations
are to be considered!
For further information please refer to the latest
Schüco order-, fabrication- and assembly manuals of the
Schüco unitized façade system UC 64 SG.NI.

———— mech. polished
- - - - - main coating surface
— · — · — secondary coating surface

		Zulässige Abweichung Permissible tolerance		Oberflächenabwicklung Circumference		VP PU	
				mech. polished		46	
				uml. total		126	
Paßmaße Close tol.		Abmaße Std. tolerance		beschichtet coated		Maßstab Scale	
Original / Änderung Revision / Version		0201		Datum Date		1 : 1	
Name				Name		Gewicht Weight	
added coating surface		gez. drawn		Tiemann		531,38 g/m	
		gepr. checked		Noureddine		Werkstoff Material	
		ges. seen		Kleffmann		Benennung Title	
						adapter profile	
						26 mm	
						TropTec UC 64 SG.NI aluminium profile	
						Zechn.-Nr. Drawing No.	
						444760_BP_0000	
						EDV erstellt Ohne Unterschrift gültig generated by EDP valid without signature	
						Ersatz für Replacement for	
						9043894_BP_0000	