


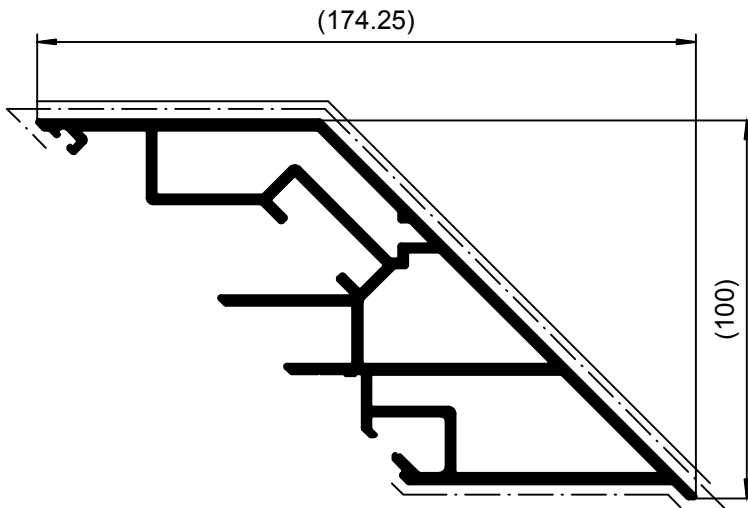

Attention!
This profile is designed for structural glazing applications!
The currently valid structural glazing bonding regulations
are to be considered!

For further information please refer to the latest Schüco order-, fabrication- and assembly manuals of the Schüco unitized façade system UC 64 SG.NI.

————— mech. polished
 - . - . - main coating surface
 — . . — secondary coating surface

		Zulässige Abweichung Permissible tolerance	Oberflächenabwicklung Circumference		VP PU				
			mch. polished	217	Maßstab Scale	1 : 2	Gewicht Weight	3.802,82 g/m	
			untl. total	681					
Paßmaße Close tol.	Abmaße Std. tolerance		beschichtet coated						
Original / Änderung Revision / Version		0302		Datum Date	Name			Benennung Title	
Name			05.01.2015						
modified weight		gez. drawn	Tiemann						
added coating surface		gepr. checked	Nouredine						
		ges. seen	Kleffmann						
					Zeichn.-Nr. Drawing No.			444920_BP_0000	
					EDV erstellt Ohne Unterschrift gültig generated by EDP valid without signature				Ersatz für Replacement for