



"All copyright, ownership, exploitation and other rights related to the concept, design and production are explicitly reserved. Reproductions, distributions and/or passing on the design to third parties – completely or partially – shall only be permitted with prior written consent. In other respects, for the use of the design our General Conditions of Sale and Delivery as well as our Technical Conditions of Delivery shall apply."

"Für die Konzeption, den Entwurf und die Herstellung bleiben alle Urheber-, Nutzungs- und sonstigen Rechte ausdrücklich vorbehalten. Vervielfältigungen und/oder Weitergabe des Entwurfs an Dritte – ganz oder teilweise – sind nur mit vorheriger schriftlicher Zustimmung erlaubt. Im übrigen gelten für die Benutzung des Entwurfs unsere allgemeinen Verkaufs- und Lieferbedingungen sowie die technischen Hinweise in den Isomat-Handbüchern."

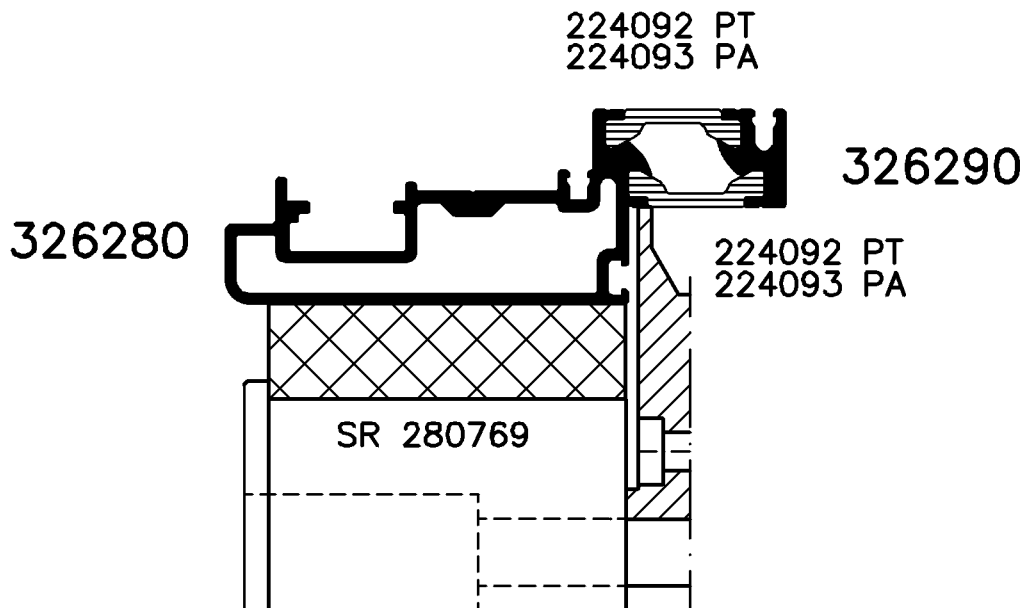


Achtung: In 2 Durchgängen rollen.
1te Durchgang mit sehr geringem Druck

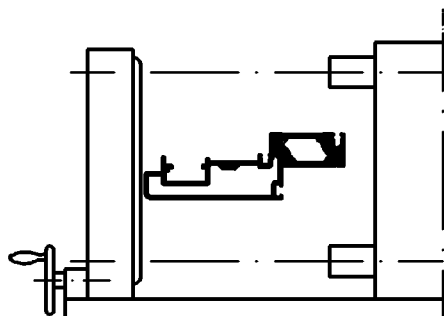

Position
SA-Rollen


Isomat 3



Durchlauf-
richtung



Isomat 4/5

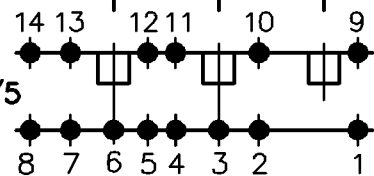

Andruck-
walze

(Pos. 8 u.14 nur im Isomat 4)

Bitte beachten Sie die technischen Hinweise in den Isomat-Handbüchern!

	Stck.	Art.-Nr. für Isomat 3/5	Art.-Nr. für Isomat 4	Bestückungsfolge		Stck.	Isomat3/4/5
A1	1	280696 A	280696 A	R1/R2/R3/A1/R4	R1	3	280741
A2	1	280697 A	280696 A	R5/R6/A2/SR	R2	3	280743
A3	1	280696 A	280696 A	R1/R2/R3/A3/R4	R3	3	280749
A4	1	280697 A	280696 A	R5/R6/A4/SR	R4	3	280753
F1	1	280695 A		R1/R2/R3/F1/R4	R5	3	296229
F2	1	280695 A		R5/R6/F2/SR	R6	3	296448
					SR	3	280769
		Zulässige Abweichung Permissible tolerance		Oberflächenabwicklung Circumference		VP Pu	
				mech. polished		Info-Plan :	
				uml. total		Maßstab Scale	
				beschichtet coated		1:1	
						Gewicht Weight	
						g/m	
						Werkstoff Material	