

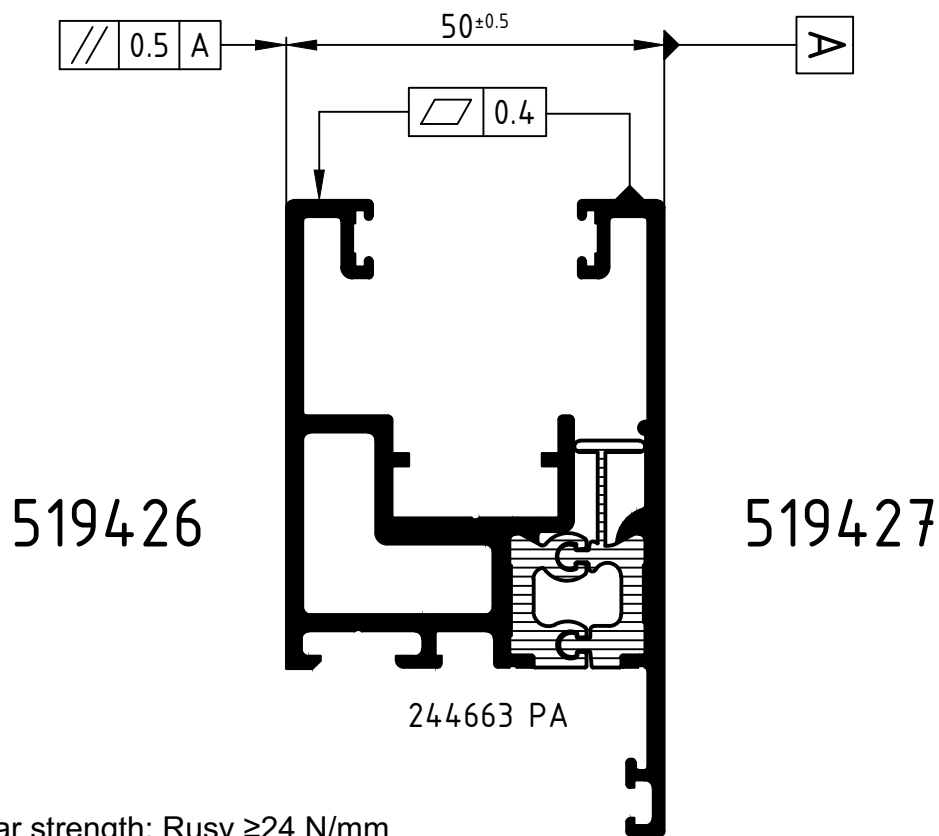


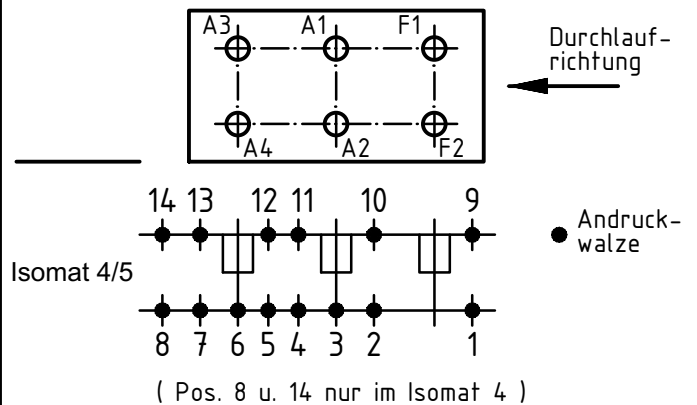

Reduced shear strength: $R_{sv} \geq 24 \text{ N/mm}$

Achtung: The result of the rolling process has to be checked on the basis of the reference dimensions in this roller plan. Please note the examination advices of the current roller manual

Attention:

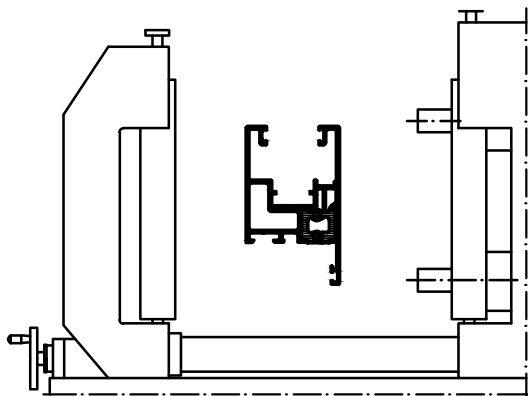

				Stck. Qty.		Art.-Nr. Zubehör Art.-No. Accessories	
				R1	2	296229 (5.5 mm)	
A1	1	282339	282339				
A2	1	282327	282327	R1/A2			
A3	1	282339	282339				
A4	1	282328	282327	R1/A4			
F1	1	282339					
F2	1	282329					
		Zulässige Abweichung Permissible tolerance		Oberflächenabwicklung Circumference		VP PU	
				mech. polished		Maßstab Scale	
				uml. total			
Paßmaße Close tol.		Abmaße Std. tolerance				Gewicht Weight	
Original / Änderung Revision / Version		0100		Datum Date		Name	
Name				23.01.2019		Benennung Title	
		gez. drawn		Finkemeyer, C.		Roller plan Isomat 4/5	
		gepr. checked		Winkler, A.			
		ges. seen		Nienhüser, R.			
				Schüco ASS 50		Sonder	
				Zeichn.-Nr. Drawing No.		519626 RP 1000	
		SCHÜCO		EDV erstellt Ohne Unterschrift gültig generated by EDP valid without signature		Ersatz für Replacement for	

SCHÜCO